



Professional cranes & hoists for lifting



Generation II Air Chain Hoist

TAIWAN : HOITECH MACHINERY INDUSTRIAL CO., LTD
VIETNAM : QUANG LIEN CRANE ELEVATOR CO., LTD.



① Gearbox

Sealed planetary gearbox complies with heavy duty cycles, gears are heat treated and mounted on high strength low friction bearings to extend its life span.

② Load Chain & Chain Guide

G80 load chain applied. The chain guide leads load chain working rapidly and smoothly on sprocket without twisting.


③ Controller

Toggle Cord (TC) & Pendant Control (PC) for users choice. They can offer variable speed control with accurate & precise positioning of loads.

④ Brake

Non-asbestos disc brake is applied automatically when the air shut-off.

⑤ Main Air Supply Shut-Off Type Overload Limiter System



Two overload limiter devices for extra safety- a Mechanical Clutch type [MCT] & a Main Air Supply Shut-off [MASSO] valve type.

These devices are pre-set at the factory to an overload limit capacity value of the hoist rated WLL x 125% and are adjustable.

The main air supply shut-off overload limiter device MASSO valve which is integrated into the air motor monitors the air pressure differential between the incoming air pressure and the exhaust air pressure.

When the overload limit capacity is reached the reduced exhaust air pressure is sensed and the higher incoming air pressure overcomes the valve spring tension and closes the valve thereby closing the supply of air to the brake which then engages. However the hoist can still function in the DOWN mode to allow the load to be lowered.

⑥ Upper and Lower Load Chain Travel Limit Switch System (LSS)



To ensure that the load chain and hoist body are not damaged which can compromise safety, it is essential to limit the maximum up/down travel limits of the load chain and load hook.

Chain stops are attached to the load chain at the UP/DOWN travel limit points on either end of the load chain.

Such Chain Stops activate the limit switch when the UP/DOWN chain travel points are reached.

When activated the limit switch mechanically closes the main air supply control piston to stop the air supply to the air motor.

When the hoist is operated in the reverse direction from the limit point the pressure on the limit switch is released which allows the main air supply control piston spring to open the main air valve and the hoist to operate.

Such LSS is incorporated into both the pendant control and toggle cord operating control types of YSA hoists.


⑦ Hoist Housing

High strength FCD cast-iron housing ensures shocks, bumps and corrosion resistance.

⑧ Air-Lift Motor

Air inlet to make vanes work, through the power of centrifugal force and air-in, the motor makes maximum torque. High quality material of vanes without O-rings inside special design to ensure powerful loading and less maintenance.

⑨ Emergency Stop Device

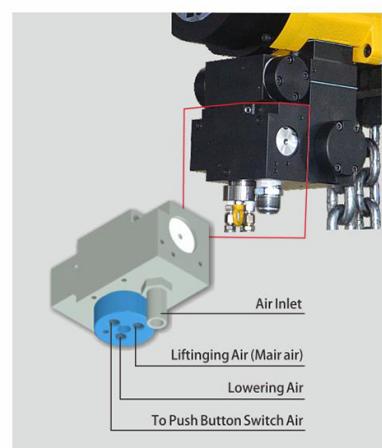


The air stream from either the Red or Blue hose ports, as indicated above, operate and activate the Emergency Stop Valve when the Emergency Stop Button on the Pendant Control Handle is depressed.


On activation the Emergency Stop Valve located on the air motor housing shuts-off the incoming main air supply to the air motor.



YSA Series

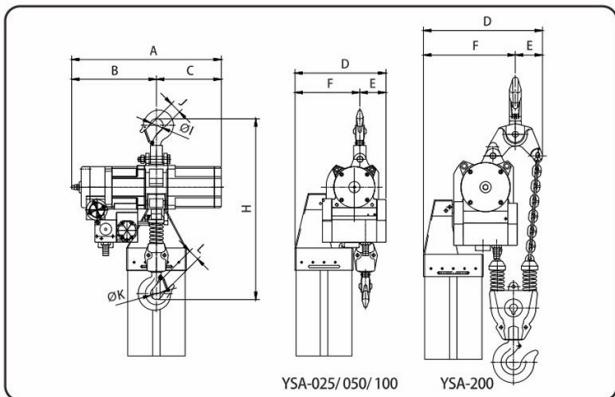

Hoist with trolley

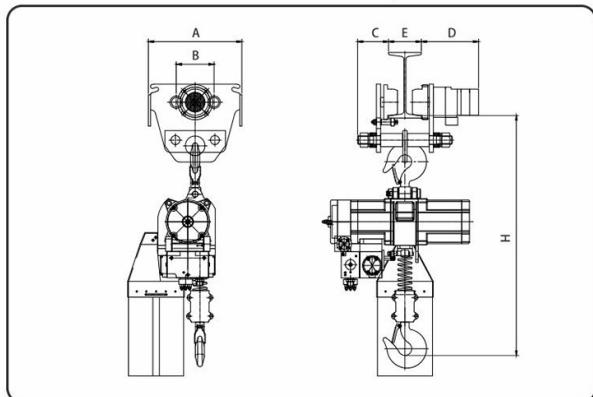

Model	Capacity (ton)	Fall no.	Dimension (mm)										N.W. (kg)	
			H	A	B	C	D	E	F	I	J	K	L	
YSA-025	0.25	1	485	371	197	174	244	70	174	40	32	40	32	32
YSA-050	0.5	1	485	402	228	174	244	70	174	40	32	40	32	36
YSA-100	1	1	496	460	255	205	251	65	186	40	32	40	32	51
YSA-200	2	2	720	460	255	205	319	73	246	46	40	46	40	60


Model	Capacity (ton)	Motor (Kw)	Air supply pressure (kg/cm²)	Traversing Speed (m/min)	Air consumption (m³/min)	Brake type	Air inlet
AT-100	1	0.2	6	20	0.6	Disk type brake	1/2"
AT-200	2	0.2	6	20	0.6	Disk type brake	1/2"

Model	Capacity (ton)	Dimension (mm)					
		H	A	B	C	D	E
YSA-025+PT-050	0.25	590	194	89	35	-	50~150
YSA-050+PT-050	0.5	590	194	89	35	-	50~150
YSA-100+AT-100	1	621	294	116	95	208	75~125
YSA-200+AT-200	2	751	322	135	100	209.5	100~150


Model	Capacity (ton)	Fall no.	Load chain (mm)	Lift (m)	Classification	Operation	Air supply pressure (kg/cm²)	Motor (kw)	Speed (m/min)	Air consumption (m³/min)	Brake type	Limit switch	Air inlet (in)	Level of noise (dB)		Main line air supply (in)
														Load	No load	
YSA-025	0.25	1	Ø6.3x19.1	3	2m	Toggle Cord Control (TC) or Pendant Control (PC)	6	1.5	18	2	Disk type brake	Upper/Lower limit	1/2"	85	82	3/4"
							4	0.8	8	1			1/2"	85	82	3/4"
YSA-050	0.5	1	Ø6.3x19.1	3	2m	Toggle Cord Control (TC) or Pendant Control (PC)	6	1.5	11	2	Disk type brake	Upper/Lower limit	1/2"	85	82	3/4"
							4	0.8	5	1			1/2"	85	82	3/4"
YSA-100	1	1	Ø7.1x20.2	3	2m	Toggle Cord Control (TC) or Pendant Control (PC)	6	2.0	7.6	2	Disk type brake	Upper/Lower limit	1/2"	85	82	3/4"
							4	1.0	3.4	1			1/2"	85	82	3/4"
YSA-200	2	2	Ø7.1x20.2	3	2m	Toggle Cord Control (TC) or Pendant Control (PC)	6	2.0	3.8	2	Disk type brake	Upper/Lower limit	1/2"	85	82	3/4"
							4	1.0	1.7	1			1/2"	85	82	3/4"



YSA Series

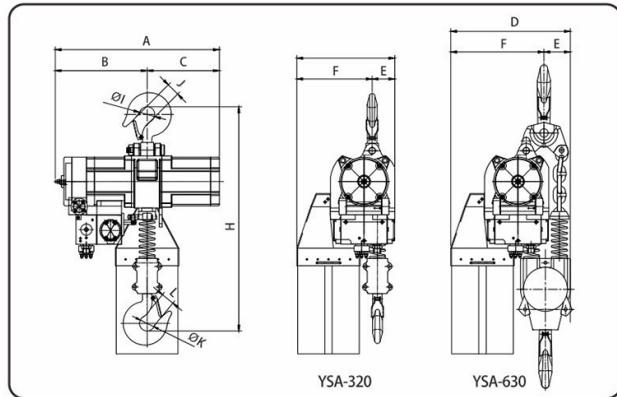

Hoist with trolley

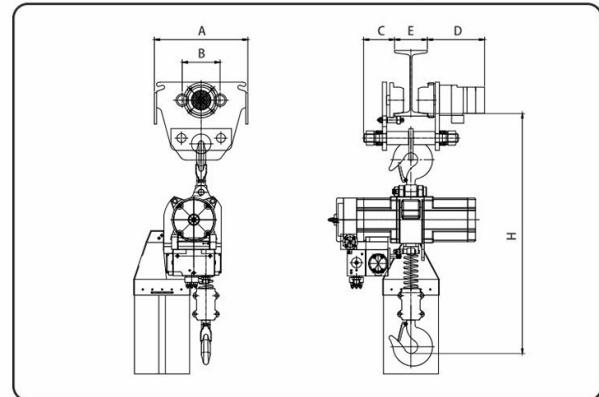

Model	Capacity (ton)	Fall no.	Dimension (mm)											N.W. (kg)
			H	A	B	C	D	E	F	I	J	K	L	
YSA-320	3.2	1	764	559	313	246	334	77	257	52	47	52	47	108
YSA-630	6.3	2	982	559	313	246	334	77	257	62	52	62	52	138


Model	Capacity (ton)	Motor (Kw)	Air supply pressure (kg/cm²)	Traversing Speed (m/min)	Air consumption (m³/min)	Brake type	Air inlet
AT-320	3.2	0.2	6	20	0.6	Disk type brake	1/2"
AT-630	6.3	0.2	6	20	0.6	Disk type brake	1/2"

Model	Capacity (ton)	Dimension (mm)					
		H	A	B	C	D	E
YSA-320+AT-320	3.2	902	356	144	117.5	217	125~175
YSA-630+AT-630	6.3	1125	386	183	132.5	219	125~175


Model	Capacity (ton)	Fall no.	Load chain (mm)	Lift (m)	Classification	Operation	Air supply pressure (kg/cm²)	Motor (kw)	Speed (m/min)	Air consumption (m³/min)	Brake type	Limit switch	Air inlet (in)	Level of noise (dB)		Main line air supply (in)
														Load	No load	
YSA-320	3.2	1	Ø13x36	3	2m	Toggle Cord Control (TC) or Pendant Control (PC)	6	3.5	4.8	4	Disk type brake	Upper/Lower limit	3/4"	90	87	2"
							4	1.8	2.2	2			3/4"	90	87	2"
							6	3.5	2.4	4			3/4"	90	87	2"
							4	1.8	1.1	2			3/4"	90	87	2"
YSA-630	6.3	2	Ø13x36	3	2m											



YSA Series

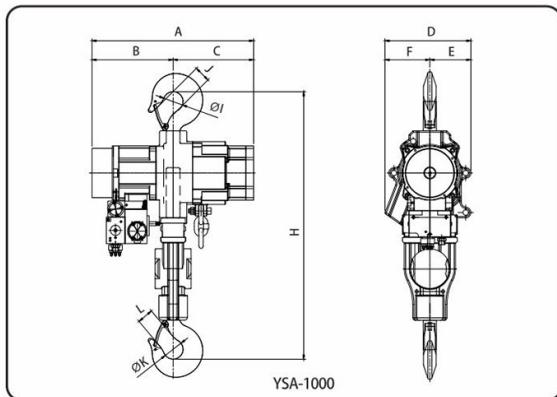

YSA Series

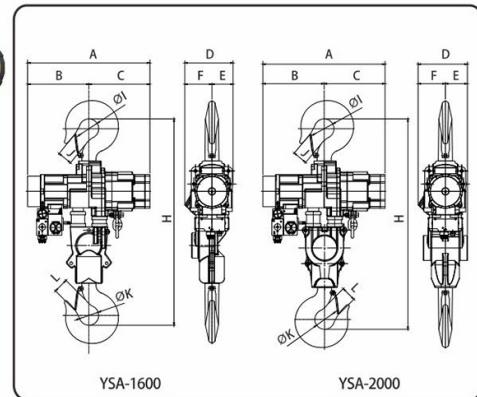

Model	Capacity (ton)	Fall no.	Dimension (mm)											N.W. (kg)
			H	A	B	C	D	E	F	I	J	K	L	
YSA-1000	10	2	1015	614	308	308	326	156	170	75	69	75	69	186

Model	Capacity (ton)	Fall no.	Dimension (mm)											N.W. (kg)
			H	A	B	C	D	E	F	I	J	K	L	
YSA-1600	16	3	1260	746	374	372	295	129	166	120	109	120	109	327
YSA-2000	20	4	1285	746	374	372	301	135	166	120	109	120	109	383

Model	Capacity (ton)	Fall no.	Load chain (mm)	Lift (m)	Classification	Operation	Air supply pressure (kg/cm ²)	Motor (kw)	Speed (m/min)	Air consumption (m ³ /min)	Brake type	Limit switch	Air inlet (in)	Level of noise (dB)		Main line air supply (in)
														Load	No load	
YSA-1000	10	2	Ø16x45	3	2m	Toggle Cord (TC) or Pendant Control (PC)	6	3.5	1.6	4	Disk type brake	Upper/Lower limit	1"	90	87	2"
							4	1.8	0.7	2			1"	90	87	2"
YSA-1600	16	3	Ø16x45	3	2m	Toggle Cord (TC) or Pendant Control (PC)	6	3.5	1.0	4	Disk type brake	Upper/Lower limit	1"	90	87	2"
							4	1.8	0.4	2			1"	90	87	2"
YSA-2000	20	4	Ø16x45	3	2m	Toggle Cord (TC) or Pendant Control (PC)	6	3.5	0.8	4	Disk type brake	Upper/Lower limit	1"	90	87	2"
							4	1.8	0.3	2			1"	90	87	2"

■ Air Flow System



- Compressor : above 30hp to match air storage supplement.
- Air Filter : need to clean & replace regularly.
- Pressure Regulator: 8kg / cm² at least.
- Lubricator : 6 drops / min or more adjusted according to operating status.
- Connect the main air supply hose to the main air inlet of the hoist. Supply hose i.d. sizes : 0.25 ton ~ 2 ton : i.d. 1/2" ; 3.2 ton ~ 20 ton : i.d. 3/4".
- Air supply pressure range needs to be Working Air Pressure 4~6 Kg / cm². The hoist performance and lifting / lowering speed is affected by the W.A.P.
- Use a dedicated air supply line to the hoist to prevent air starvation to the hoist which can occur if used on the same air supply line as other pneumatic equipment.

■ Federation Europeenne De La Manutention

	Cubic mean value Definitions				Average operating time per day in hours						
	1 (light)	($K \leq 0.50$) Mechanisms or parts thereof, usually subject to very small loads and in exceptional cases only to maximum loads.	0.25-0.5	0.5-1	1-2	2-4	4-8	8-16	> 16		
2 (medium)	($0.50 < K \leq 0.63$) Mechanisms or parts thereof, usually subject to small loads but rather often to maximum loads.	0.12-0.25	0.25-0.5	0.5-1	1-2	2-4	4-8	8-16	> 16		
3 (heavy)	($0.63 < K \leq 0.80$) Mechanisms or parts thereof, usually subject to medium loads but frequently to maximum loads.	≤ 0.12	0.12-0.25	0.25-0.5	0.5-1	1-2	2-4	4-8	8-16		
4 (very heavy)	($0.80 < K \leq 1$) Mechanisms or parts thereof, usually subject to maximum or almost to maximum loads.	≤ 0.12	0.12-0.25	0.25-0.5	0.5-1	1-2	2-4	4-8			
Classification of Mechanisms FEM 9.511				1 Dm	1 Cm	1 Bm	1 Am	2 m	3 m	4 m	5 m

■ ISO/FEM (9.511)

Classification of mechanisms into groups

1 Dm M 1	1 Cm M 2	1 Bm M 3	1 Am M 4	2 m M 5	3 m M 6	4 m M 7	5 m M 8
-------------	-------------	-------------	-------------	------------	------------	------------	------------


Classification of mechanisms

Load spectrum	Cubic mean value	Class of operation time								
		V0.06	V0.12	V0.25	V0.5	V1	V2	V3	V4	V5
TO	T1	T2	T3	T4	T5	T6	T7	T8		
≤ 0.12	≤ 0.25	≤ 0.5	≤ 1	≤ 2	≤ 4	≤ 8	≤ 16	> 16		
1 L1 k ≤ 0.50			1 Dm	1 Cm	1 Bm	1 Am	2 m	3 m	4 m	
2 L2 0.50 < k ≤ 0.63			1 Dm	1 Cm	1 Bm	1 Am	2 m	3 m	4 m	5 m
3 L3 0.63 < k ≤ 0.80			1 Dm	1 Cm	1 Bm	1 Am	2 m	3 m	4 m	5 m
4 L4 0.80 < k ≤ 1.00			1 Cm	1 Bm	1 Am	2 m	3 m	4 m	5 m	

Class of operation time

Class of operation time	Average operating time per day (in hours)	Calculated total operating time in hours
V0.06 T0	≤ 0.12	200
V0.12 T1	≤ 0.25	400
V0.25 T2	≤ 0.5	800
V0.5 T3	≤ 1	1600
V1 T4	≤ 2	3200
V2 T5	≤ 4	6300
V3 T6	≤ 8	12500
V4 T7	≤ 16	25000
V5 T8	≤ 16	50000

■ Operation Cycle

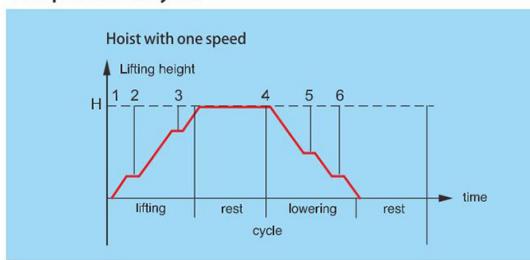

Professional cranes & hoists for lifting



Taiwan Black Bear Factory



QUANG LIEN Factory



TAIWAN : HOITECH MACHINERY INDUSTRIAL CO., LTD

ADD : No.126, Lane 332, Sec.8, HuanJhong Rd., Wu-Zih, Taichung, Taiwan, R.O.C
TEL : +886-4-2335 3333 FAX : +886-4-2335 3031
E-mail : hoitech2222@gmail.com



VIETNAM : QUANG LIEN CRANE ELEVATOR CO., LTD.

ADD : 299/15A Ly Thuong Kiet, P.11 - Q.11 - TP.HCM
TEL : +84-8-3863 6666 FAX : +84-8-3864 7212
E-mail : quanglienrcane@hcm.vnn.vn
WEB : www.quanglien.com

- Revision of March, 2016 (Edition No.1) #950287
- No further notice while sizes and dimensions update;
Quotations are based on practical dimensions.
- Due to the printing factors, the color of the products is
subject to minor deviation from the physical objects.